

AcquaSaver



Water Diversion Valve



Hydraulically Operated
Solid Brass Construction
Full Flow


W
WaterMark
ATS 5200.477
WMK 60075
AGA

AcquaSaver

AcquaSaver is an automatic hydraulically operated mains to rainwater changeover valve. Ideal for rainwater harvesting which switches from mains to tank whenever tank water is available and automatically defaults to mains in the event of a power or pump failure.


Features

- Easy to install
- Full flow
- Solid brass- Weather proof- Built to last!
- Does not require regular maintenance
- No electrical components
- No electrical consumption
- Suitable for any surface pressure pump or submersible pressure pump
- Can be mounted in any position
- Dual check valve for backflow prevention (WATERMARK APPROVED)
- Patented design
- Manual override
- 2 Year warranty
- Can be positioned any distance from the pump
- Can be mounted directly onto the pump

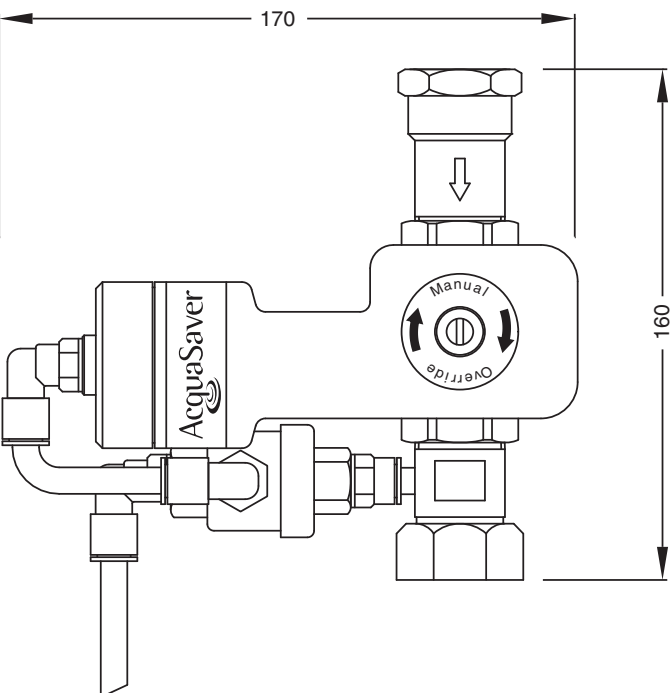

Specifications

Max mains Pressure 600kpa
 Max pump Pressure 800kpa
 Max Flow Rate 100Lpm
 Rainwater Inlet 25mm 1" BSP F
 Mains Water in 20mm ¾" BSP F
 Weight 2.2Kg
 Complies to AS/NZS 3500.1
 when installed by a licensed Plumber.

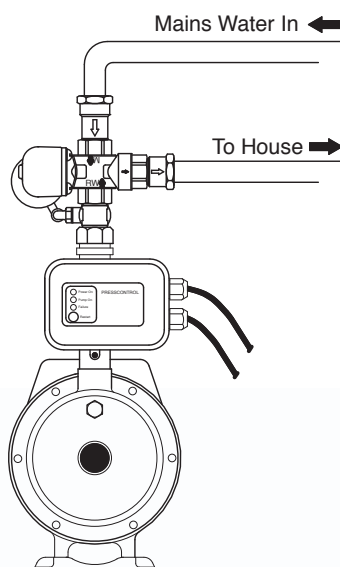

www.acquasaver.com.au

available from:



18 - 20 Cottage Street,
 Blackburn VIC 3130 Australia
 Tel: +61 3 98 78 15 75
 Fax: +61 3 98 94 28 20
 Email: info@beltrami.com.au
 Web: www.beltrami.com.au