

TEMPUS® AG PR

Pressure Sensor Module

The module detects the pressure of your irrigation system.

Thanks to the pre-wired pressure sensor, Tempus® Ag PR allows you to check the operating status of your system, to prevent malfunctions and to warn you if pre-set thresholds are exceeded.


The module communicates with the Gateway (4G or Wi-Fi), forwarding the detected data and also allows direct connection from smartphone/tablet via Bluetooth®.

SPECIFICATIONS AND FEATURES

- LoRa™ radio connection
- 1 input for pressure sensor
- LoRa™ range up to 800m
- Pressure sensor included and pre-wired
- 0-5V analogue input
- Pressure measurement 0-1600 kPa
- Bluetooth® Smart 4.0 Low Energy
- Warning feature when thresholds exceeded
- Waterproof connector (MetriPack-150)
- Sensor thread: 1/4" BSP
- Remote management via MyToroTempus App and MyToroTempus.com Web platform
- IP68 waterproof
- Powered by 9V DC battery
- Operating temperature: -20° C/60° C

Coding

| Code | Description |
|----------------|--|
| TEMPUS-AG-PR-A | Tempus® Ag PR - Pressure Sensor Module |

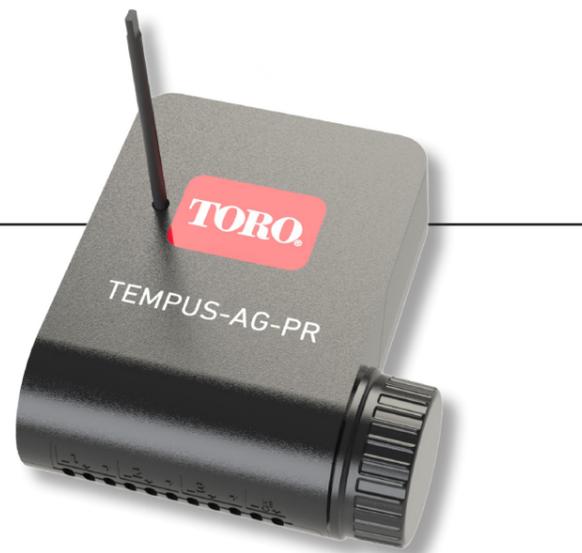

LoRa™ controlled, IP68, battery-powered pressure sensor module.

**NO WIRING.
THE MODULE IS
BATTERY-POWERED**

Discover MyToroTempus App to monitor and control TEMPUS® AG SYSTEM



Free download on App Store or Google Play

Download on the **App Store** GET IT ON **Google Play**



The pressure sensor is connected to the module directly at the factory

The sensor can be disconnected thanks to its waterproof Metripack-150 connector



Bracket for installation included



Metripack-150 waterproof connector included



Battery not included